




# SYSTEMS

ALUMINUM WINDOW ACCESSORIES

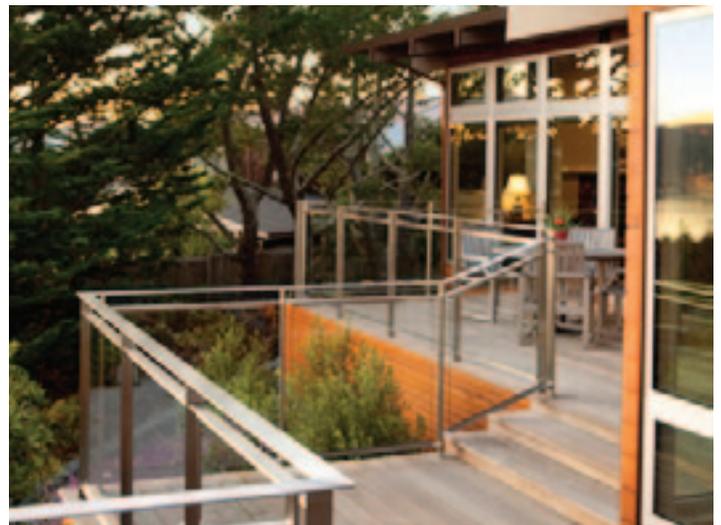

800.475.5061 | [gerkin.com](http://gerkin.com)

# SYSTEMS

## ALUMINUM WINDOW ACCESSORIES

### SUBFRAME SYSTEM | FEATURES

Gerkin subframe is a thermally broken receptor system that is designed to make window installation quick, easy and can be used in both new construction and retrofit applications. The sub sill is a one-piece receptor with an exterior weep system to channel the moisture to the exterior. Extruded legs are used to trap the window into place. The subhead and jambs are a two-piece receptor with a vinyl bulb on the interior and exterior legs which snap into place and give the window a snug fit into the opening. When using the subframe, there will be a 1/4" space on the head and jambs allowing the window room for thermal expansion and contraction. The subframe is color matched to the Rhino windows which gives the opening a one-piece finished look. The subframe can be used in a one-window opening or multiple window configurations. Gerkin's structural mullion, h-channel and stacking frame options give the end user many different configurations to choose from. Gerkin also has an extruded sill flashing available giving a complete window system.

Some advantages of using the Gerkin subframe system are:

1. The complete installation can be done from the interior of the building eliminating expensive lifts and bulky scaffolding.
2. Subframe helps to speed up the installation on multiple window configurations.
3. All fasteners are hidden.

#### 2-3/8" Subframe:



#### 4-5/16" Subframe



# SYSTEMS

## ALUMINUM WINDOW ACCESSORIES

### PANNING SYSTEM | FEATURES

Gerkin panning is designed to cover existing window frames for jobs when tear out is too costly or cannot be done. The panning has 3 7/8" legs on the exterior that can be field ripped to cover many conditions giving you the look of a new window system without tearing out the old window frames. The panning has a sloped sill ensuring that the moisture drains away from the opening. The jambs and head have a vinyl bulb on the exterior leg for easy installation. Gerkin supplies interior clips that fasten to the window and the condition trapping the window to the panning system. The panning is color matched to the Rhino windows which gives the opening a one piece finished look. The panning can be used in a one window opening or multiple window configurations with the use of Gerkin's structural mullion, h-channel and stacking frame options giving the end user many different configurations to choose from. Gerkin also has an optional 1"x 3" interior snap-trim to cover up the interior condition.


Some advantages of using the Gerkin panning system are:

1. Allows windows to be installed over existing window frames.
2. The panning system helps to save time and money.
3. All fasteners are hidden.




# SYSTEMS

## ALUMINUM WINDOW ACCESSORIES




### Stacking Frames:

All Rhino windows can be field stacked together using an integral stacking frame. (Sliders and single hungs require H channels for side stacking). Windows can be stacked at the head or sill and jambs, which allow for the creation of many window configurations.



### Stacking H Channel

This accessory is used for side stacking single hungs and sliders together in the field. The H channel can be used for single hung sizes up to 48 x 64 and slider sizes up to 72 x 64.



### Structural Mullion:

This accessory provides additional support in large rough openings having multiple window configurations. The structural mullion is used vertically between windows to provide support and can be anchored to the head and sill of a rough opening prior to installing the windows.




### 2 3/8" Structural Stack:

This accessory provides additional support in larger rough openings having multiple window configurations. The structural stack can be used both horizontally and vertically between windows to provide structural support. The structural stack is applied after the first window is installed and before the second window is installed.




### 4 5/16" Structural Stack:

This accessory provides additional support in larger rough openings having multiple window configurations. The structural stack can be used both horizontally and vertically between windows to provide structural support. The structural stack is applied after the first window is installed and before the second window is installed. Used with 58F, 5822 and 5420.



### Sill Flashing:

Gerkin offers an optional sill flashing that can be used either directly under the Rhino window or in conjunction with the subframe system. This flashing is extruded aluminum and extends 2 5/8" beyond the front of the window.



### Strap Anchors:

Rhino hopper, awning, casement and fixed windows can be anchored into masonry conditions and extend over conditions such as expansion joints in which anchoring by traditional methods is not possible. The strap anchor allows the window anchor to be located up to 1 1/2" behind the window.



### PTAC Louvers:

Gerkin can glaze 1" louvers into our window system for PTAC units. When louvers are used with windows, one rough opening can be created instead of two. (The window is stacked on top of the louver frame). This saves framing time and materials and gives a total matching system. Gerkin can provide a plank-off panel with appropriate cutouts to receive the PTAC unit.


# SYSTEMS

ALUMINUM WINDOW ACCESSORIES


SPECIALTY SHAPES

## CUSTOM SHAPES 5500 AND 58F FRAMES


Angle and size limitations apply




Left Trapezoid

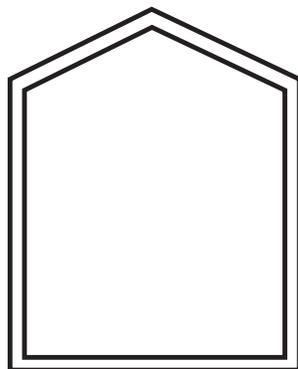

Pentoid



Right Trapezoid



Octagon




Extended Leg Octagon

# SYSTEMS


ALUMINUM WINDOW ACCESSORIES

SPECIALTY SHAPES


## CUSTOM SHAPES 5700 FRAME



Left Quarter Round




Half Round



Right Quarter Round




Left Quarter Arch Top




Arch Top Eyebrow




Right Quarter Arch Top



Extended Leg  
Left Quarter Arch Top

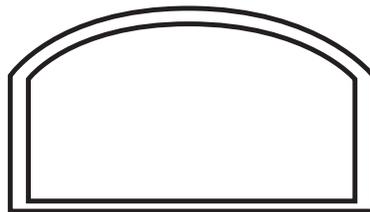

Extended Leg  
Arch Top



Extended Leg  
Right Quarter Arch Top